
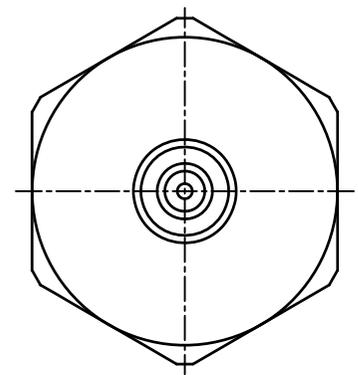
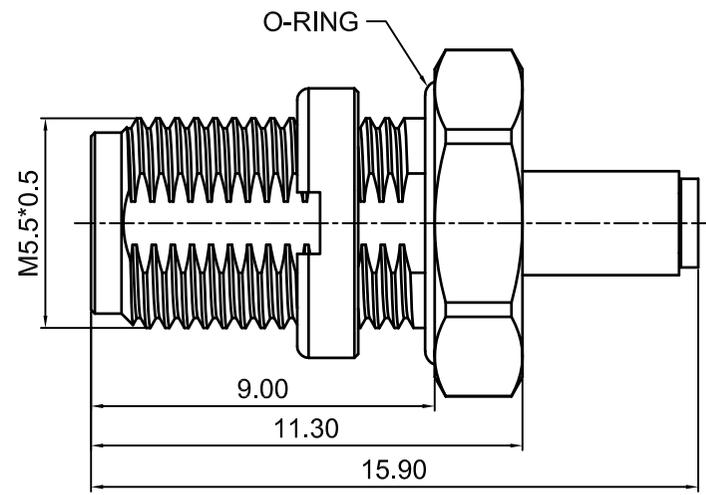
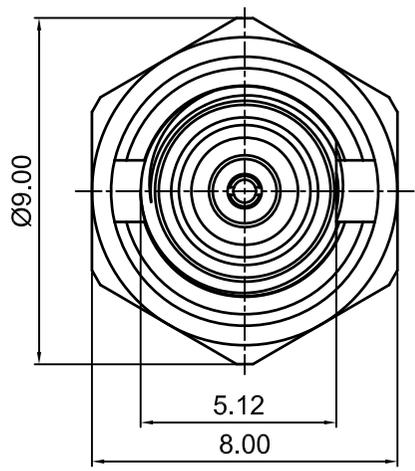



Customer code:	NONE	Part number:	TBD	Rev:	B	Changing log			
----------------	------	--------------	-----	------	---	--------------	--	--	--

Rev.	ECN#	Description	Changed by	Date
A	NONE	FIRST RELEASE.	M.YANG	2021-07-25
B	NONE	ADD A HEX NUT TO IMPROVE AIR TIGHTNESS.	M.YANG	2021-07-30

- NOTE:
- ELECTRICAL CHARACTERISTICS:
 - FREQUENCY RANGE:DC~6GHz
 - IMPEDANCE:50Ω
 - VSWR:1.3 MAX @ 6GHz.
 - INSULATION RESISTANCE: 5000MΩ MIN.
 - CONTACT RESISTANCE
 - CENTER CONTACT: 3 MΩ
 - OUTER CONTACT: 2.5 MΩ
 - MECHANICAL CHARACTERISTICS:
 - TEMPERATURE RANGE: -40°C~+80°C
 - WATERPROOF: IP67 (CONNECTORS MATING)
 - DURABILITY: 100 CYCLES.
 - ALL MATERIALS AND PROCESS ARE RoHS COMPLIANT

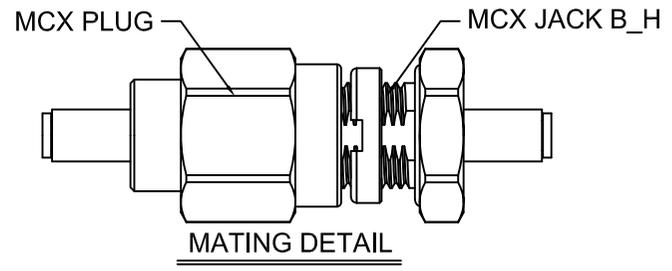

⑦	NUT	BRASS	NICKEL	1EA
⑥	O-RING	SILICONE RUBBER	NATURAL	1EA
⑤	INSULATOR	TEFLON	NATURAL	1EA
④	FERRULE	BRASS	NICKEL	1EA
③	CONTACT PIN	BERYLLIUM COPPER	GOLD	1EA
②	INSULATOR	TEFLON	NATURAL	1EA
①	BODY	BRASS	NICKEL	1EA
ITEM	NAME	MATERIAL	TREATMENT	QTY

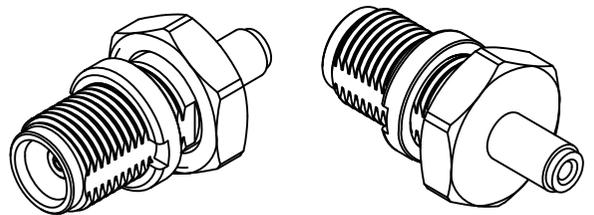

SHINTO SHINTO ELECTRONICS CO.,LTD
<http://www.shinto-electronics.com>

TOLERANCES UNLESS OTHERWISE SPECIFIED		Signature		Shinto P/N: TBD	
ONE PLACE DECIMAL .X	±0.20	Approved By:		Description: MCX JACK B_H FOR RF1.13 WATERPROOF	
TWO PLACE DECIMAL .XX	±0.1	Checked By:		Material: See BOM	Treatment: See BOM
THREE PLACE DECIMAL .XXX	±0.05	Drawn By:	M.YANG	Unit: mm	Size: A4
HOLE DIA. VARIATION .XX	N/A			Scale: 5:1	Sheet: 1 of 2
ANGULAR DIMENSION	±3°				