
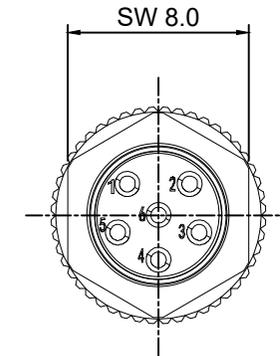
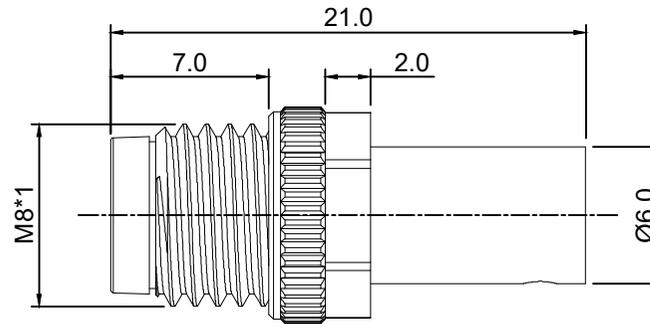
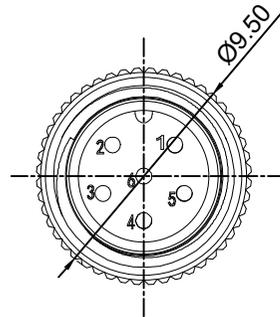


Customer code:	NONE	Part number:	M8AMS06-0019	Rev:	A	Changing log			
----------------	------	--------------	--------------	------	---	--------------	--	--	--

Rev.	ECN#	Description	Changed by	Date
A	NONE	FIRST RELEASE.	Tao	2022-09-22
B	NONE	Coupling nut changed to hexagon.	Tao	2022-12-06

NOTE:

1. ELECTRICAL CHARACTERISTICS:
 - 1.1 VOLTAGE PROOF: 800V DC
 - 1.2 RATED VOLTAGE: 60V DC
 - 1.3 RATED CURRENT: 4A MAX.
 - 1.4 CONTACT RESISTANCE: 3mΩ MAX
 - 1.5 INSULATION RESISTANCE: 2000MΩ MIN.
2. MECHANICAL CHARACTERISTICS:
 - 2.1 TEMPERATURE RANGE: -40°C~+85°C
 - 2.2 MATING CYCLE: 100 TIMES
 - 2.3 WATERPROOF: IP67
3. ALL MATERIALS AND PROCESS ARE RoHS COMPLIANT.

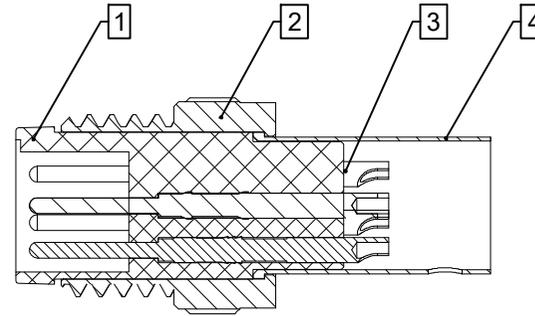

④	FERRULE	COPPER ALLOY	NICKEL	1EA
③	CONTACT	COPPER ALLOY	GOLD	6EA
②	COUPLING NUT	COPPER ALLOY	NICKEL	1EA
①	INSULATOR	NYLON	NATURAL	1EA
ITEM	NAME	MATERIAL	TREATMENT	QTY
Bill Of Material				

TOLERANCES UNLESS OTHERWISE SPECIFIED	
ONE PLACE DECIMAL .X	±0.20
TWO PLACE DECIMAL .XX	±0.10
THREE PLACE DECIMAL .XXX	±0.05
HOLE DIA. VARIATION .XX	N/A
ANGULAR DIMENSION	±3°

Signature	
Approved By:	
Checked By:	
Drawn By:	Tao

SHINTO SHINTO ELECTRONICS CO.,LTD
<http://www.shinto-electronics.com>

Shinto P/N: M8AMS06-0019	
Description: M8 Code A Male Straight 6P	
Material: See BOM	Treatment: See BOM
Unit: mm	Size: A4
Scale: 3:1	Sheet: 1 of 1

