
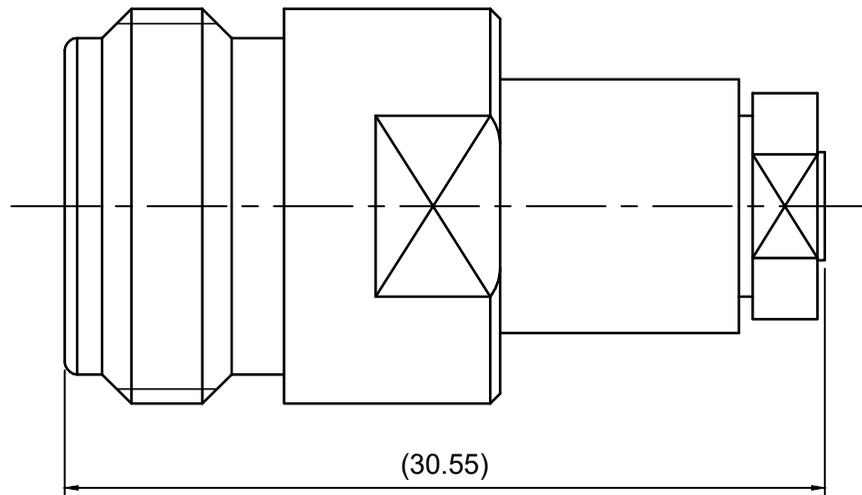
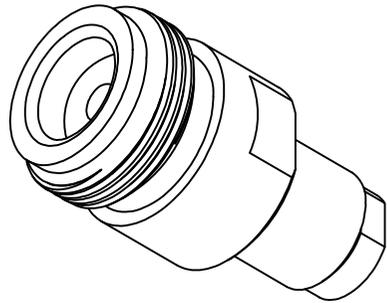


Customer code:	NONE	Part number:	N-J-3507-1	Rev:	A	Changing log			
----------------	------	--------------	------------	------	---	--------------	--	--	--

Rev.	ECN#	Description	Changed by	Date
A	NONE	FIRST RELEASE.	Jo.Yuan	2023-12-08

NOTE:

1. ELECTRICAL CHARACTERISTICS:
 - 1.1 IMPEDANCE:50Ω
 - 1.2 FREQUENCY RANGE:DC~18GHz
 - 1.3 VSWR:1.3 MAX
 - 1.4 INSERTION LOSS:≤0.05×sqrt(F(F in GHz)) dB
 - 1.5 DIELECTRIC WITHSTAND VOLTAGE:500V
 - 1.6 INSULATION RESISTANCE:5000MΩ MIN
2. MECHANICAL CHARACTERISTICS:
 - 2.1 DURABILITY: 500 CYCLES MIN.
3. TEMPERATURE RANGE: -55°C~+165°C
4. ALL MATERIALS AND PROCESS ARE RoHS COMPLIANT.

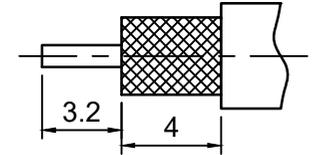

③	INSULATOR	PTFE	NATURE	1 EA
②	CENTER CONTACT	BERYLLIUM COPPER	GOLD	1 EA
①	OUTER CONTACT	STAINLESS STEEL	PASSIVATED	1 EA
ITEM	NAME	MATERIAL	TREATMENT	QTY

Bill Of Material

SHINTO SHINTO ELECTRONICS CO.,LTD
<http://www.shinto-electronics.com>

TOLERANCES UNLESS OTHERWISE SPECIFIED		Signature		Shinto P/N: N-J-3507-1	
ONE PLACE DECIMAL .X	±0.20	Approved By:	J.DENG	Description: N JACK S/T FOR CXN3507	
TWO PLACE DECIMAL .XX	±0.10	Checked By:	M.YANG	Material:	See BOM
THREE PLACE DECIMAL .XXX	±0.02	Drawn By:	J.YUAN	Treatment:	See BOM
HOLE DIA. VARIATION .XX	N/A	Unit:	mm	Size:	A4
ANGULAR DIMENSION	±3°	Scale:	3:1	Sheet:	1 of 1