


Customer code:	NONE	Part number:	NONE	Rev:	A	Changing log			
----------------	------	--------------	------	------	---	--------------	--	--	--

Rev.	ECN#	Description	Changed by	Date
A	NONE	FIRST RELEASE.	Jo.Yuan	2024-05-08

Note:

1. Electrical characteristics:
 - 1.1 Impedance: 50Ω
 - 1.2 Frequency range: 0~40 GHz
 - 1.3 VSWR:1.35MAX
 - 1.3 Insulation resistance: 5000MΩ Min
 - 1.4 Contact resistance
 - 1.4.1 Center contact: 3.0 mΩ
 - 1.4.2 Outer contact: 2.5mΩ
2. Mechanical characteristic:
 - Mating cycle: 500 times
3. Environmental:
 - 3.1 Temperature range: -55°C~+165°C
4. All materials and process are RoHS compliant.

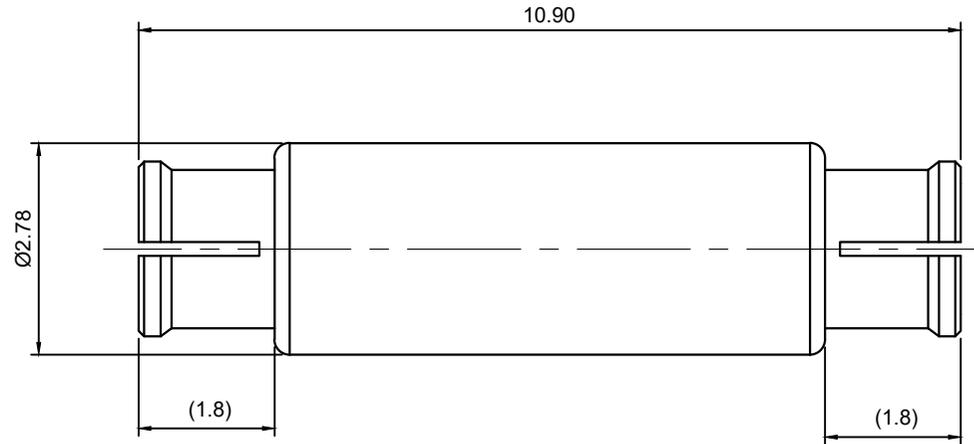

③	INSULATOR	PTFE	NATURE	1 EA
②	CONTACT PIN	QBe2	GOLD	1 EA
①	BODY	QBe2	GOLD	1 EA
ITEM	NAME	MATERIAL	TREATMENT	QTY
Bill Of Material				

TOLERANCES UNLESS OTHERWISE SPECIFIED	
ONE PLACE DECIMAL .X	±0.20
TWO PLACE DECIMAL .XX	±0.10
THREE PLACE DECIMAL .XXX	±0.02
HOLE DIA. VARIATION .XX	N/A
ANGULAR DIMENSION	±3°

Signature	
Approved By:	
Checked By:	
Drawn By:	

 SHINTO ELECTRONICS CO.,LTD http://www.shinto-electronics.com		Shinto P/N: SSMP-KK	
		Description: SSMP	
Material:	See BOM	Treatment:	See BOM
Unit: mm	Size: A4	Scale: 10:1	Sheet: 1 of 1

