


Customer code:		Part number:	SMPM-JYD	Rev:		Changing log			
----------------	--	--------------	----------	------	--	--------------	--	--	--

Rev.	ECN#	Description	Changed by	Date
A	NONE	FIRST RELEASE.	Tao	2022-11-04

NOTE:

1. ELECTRICAL CHARACTERISTICS:
 - 1.1 FREQUENCY RANGE: DC~18GHz
 - 1.2 IMPEDANCE: 50Ω
 - 1.3 INSULATION RESISTANCE: 1000MΩ MIN.
 - 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
 - 1.5 CONTACT RESISTANCE
 - 1.5.1 CENTER CONTACT: 6 mΩ
 - 1.5.2 OUTER CONTACT: 2.5 mΩ
2. MECHANICAL CHARACTERISTICS:
 - 2.1 TEMPERATURE RANGE: -55°C~+125°C
 - 2.2 MATING CYCLES:500 CYCLES Min.
3. ALL MATERIALS AND PROCESS ARE ROHS COMPLIANT.

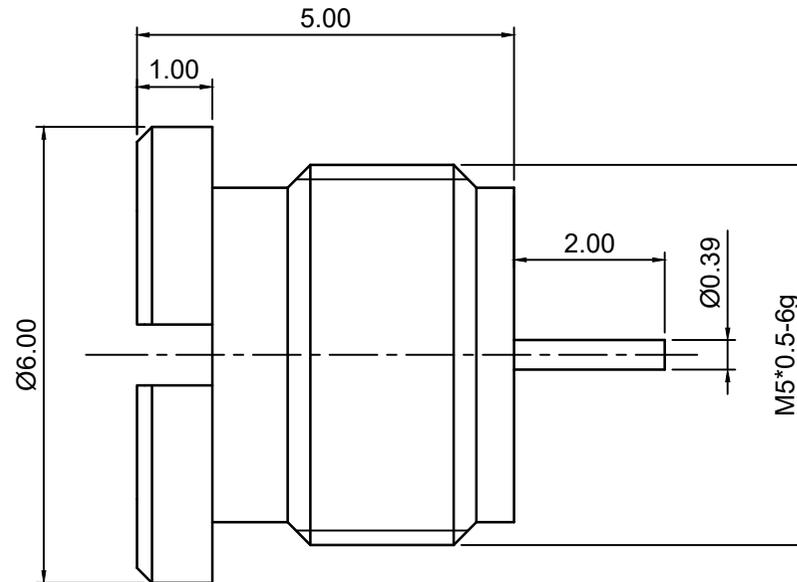

LIMITED DETENT



③	CONTACT PIN	QBe2	GOLD	1 EA
②	INSULATOR	PTFE	NONE	1 EA
①	BODY	BRASS	GOLD	1 EA
ITEM	NAME	MATERIAL	TREATMENT	QTY
Bill Of Material				

TOLERANCES UNLESS OTHERWISE SPECIFIED	
ONE PLACE DECIMAL .X	±0.2
TWO PLACE DECIMAL .XX	±0.1
THREE PLACE DECIMAL .XXX	±0.05
HOLE DIA. VARIATION .XX	N/A
ANGULAR DIMENSION	±2°

Signature		Shinto P/N: SMPM-JYD	
Approved By:		Description: SMPM-JYD,LIMITED DETENT	
Checked By:		Material: SEE BOM	Treatment: SEE BOM
Drawn By:	Tao	Unit: mm	Size: A4
		Scale: 10:1	Sheet: 1 of 1

