


Customer code:	NONE	Part number:	NONE	Rev:	A	Changing log			
----------------	------	--------------	------	------	---	--------------	--	--	--




Rev.	ECN#	Description	Changed by	Date
A	NONE	FIRST RELEASE.	Jo.Yuan	2024-08-20

NOTE:

1. ELECTRICAL CHARACTERISTICS:
 - 1.1 IMPEDANCE:50Ω
 - 1.2 FREQUENCY RANGE:DC~40GHz
 - 1.3 VSWR:1.5 MAX.
 - 1.4 INSULATION RESISTANCE: 5000MΩ
2. MECHANICAL CHARACTERISTICS:
 - 2.1 DURABILITY: 500 CYCLES MIN.
3. ENVIRONMENTAL CHARACTERISTICS:
 - 3.1 TEMPERATURE RANGE: -55°C~+155°C
 - 3.2 ALL MATERIALS AND PROCESS ARE RoHS COMPLIANT.

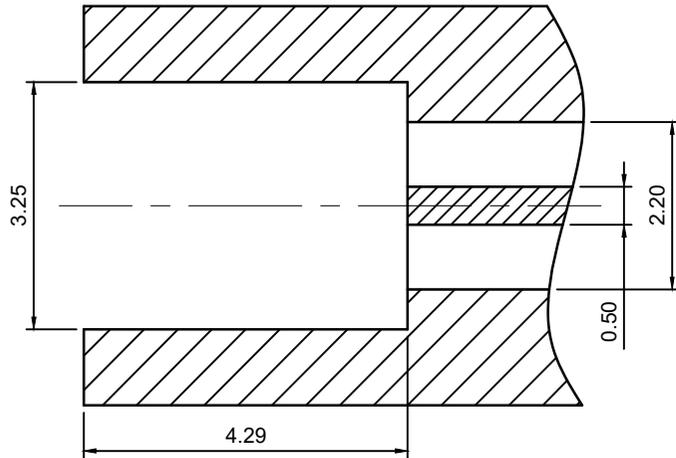

RECOMMENDED INSTALLATION DIMENSIONS

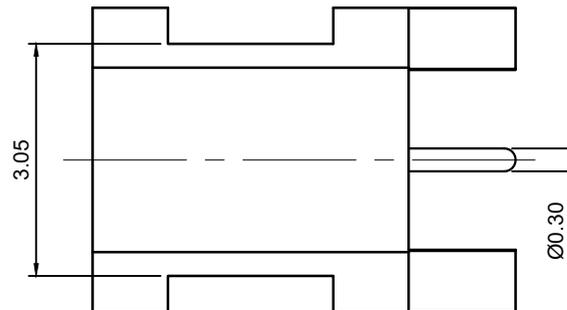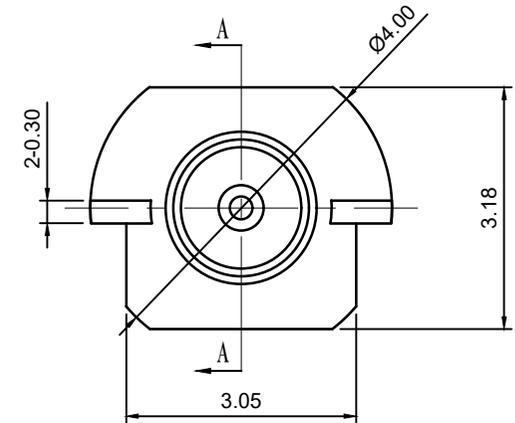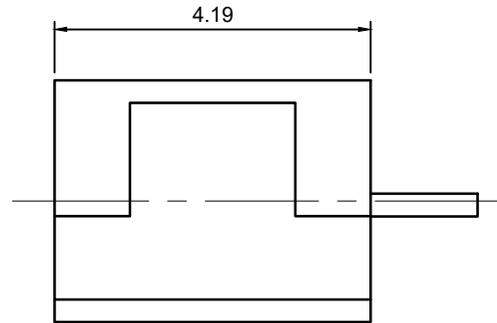

③	CONTACT	BRASS	GOLD	1EA
②	INSULATOR	PTFE	NATURE	1EA
①	BODY	BRASS	GOLD	1EA
ITEM	NAME	MATERIAL	TREATMENT	QTY
Bill Of Material				

TOLERANCES UNLESS OTHERWISE SPECIFIED		
ONE PLACE DECIMAL	.X	±0.2
TWO PLACE DECIMAL	.XX	±0.10
THREE PLACE DECIMAL	.XXX	±0.05
HOLE DIA. VARIATION	.XX	N/A
ANGULAR DIMENSION		±0.5°

Signature	
Approved By:	
Checked By:	
Drawn By:	

SHINTO ELECTRONICS CO.,LTD
<http://www.shinto-electronics.com>

Shinto P/N: SMPM-JHD10-S			
Description: SMPM PLUG ,SMOOTH BORE			
Material:	See BOM	Treatment:	See BOM
Unit: mm	Size: A4	Scale: 10:1	Sheet: 1 of 1

