

Rev.	ECN#	Description	Changed by	Date
A	NONE	FIRST RELEASE.	M.YANG	2022-05-17

NOTE:






1 ELECTRICAL CHARACTERISTICS:

- 1.1 IMPEDANCE: 50Ω
- 1.2 FREQUENCY RANGE: 300MHz
- 1.3 VSWR: 1.6 MAX.
- 1.4 OPERATING VOLTAGE: AC 1600V RMS


2 MECHANICAL CHARACTERISTICS:

- 2.1 TEMPERATURE RANGE: -65°C~+165°C
- 2.2 DURABILITY: 500 CYCLES.

3 ALL MATERIALS AND PROCESS ARE RoHS COMPLIANT

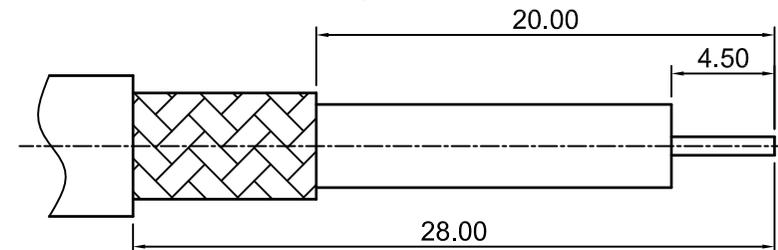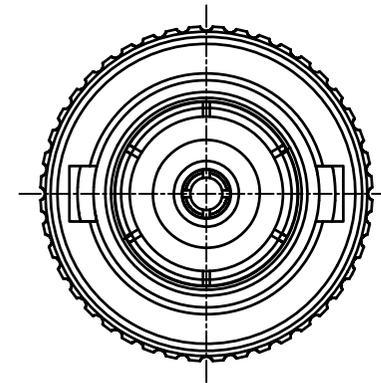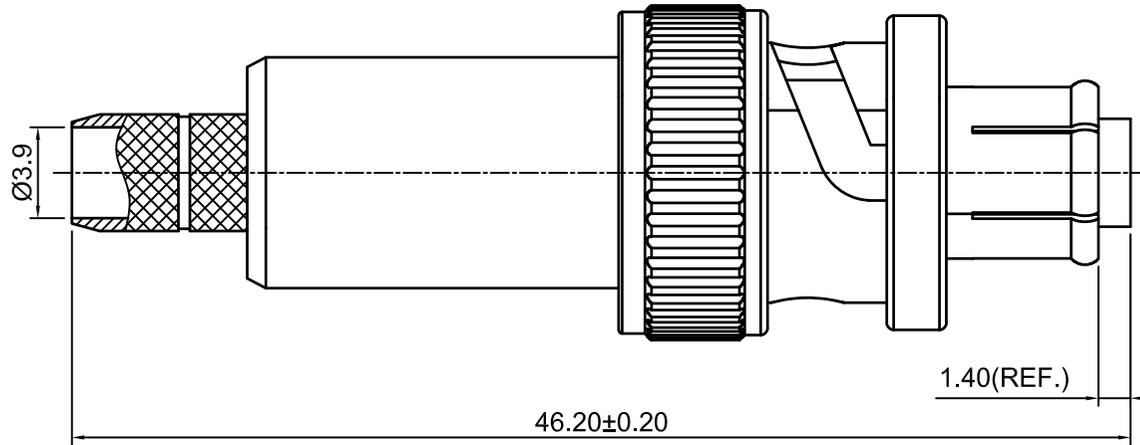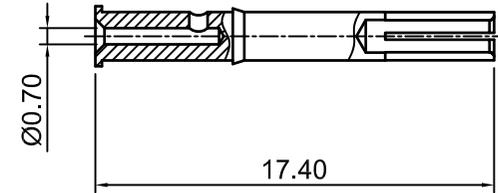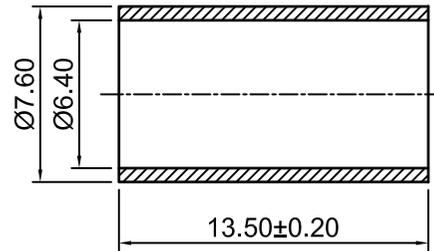

RECOMMENDED STRIP DIMENSION

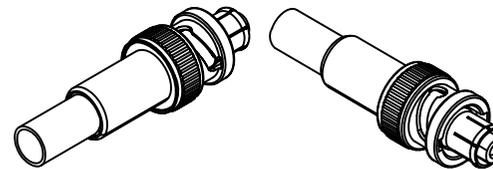

⑧	FERRULE	BRASS	NICKEL	1 EA
⑦	CONTACT PIN	BERYLLIUM COPPER	GOLD	1 EA
⑥	COUPLING NUT	BRASS	NICKEL	1 EA
⑤	OUTER CONTACT	BERYLLIUM COPPER	NICKEL	1 EA
④	GASKET	SILICONE RUBBER	NATURE	1 EA
③	INSULATOR	TEFLON	NATURE	1 EA
②	SPRING WASHER	BERYLLIUM COPPER	NICKEL	1 EA
①	BODY	BRASS	NICKEL	1 EA
ITEM	NAME	MATERIAL	TREATMENT	QTY

Bill Of Material

TOLERANCES UNLESS OTHERWISE SPECIFIED		
ONE PLACE DECIMAL .X		±0.20
TWO PLACE DECIMAL .XX		±0.10
THREE PLACE DECIMAL .XXX		±0.02
HOLE DIA. VARIATION .XX	N/A	
ANGULAR DIMENSION		±3°

Signature	
Approved By:	
Checked By:	
Drawn By:	

SHINTO SHINTO ELECTRONICS CO.,LTD http://www.shinto-electronics.com	
Shinto P/N: SHV-P-4	
Description: SHV PLUG STRAIGHT FOR RG59 CABLE	
Material: See BOM	Treatment: See BOM
Unit: mm	Size: A4
Scale: 3:1	Sheet: 1 of 1

