
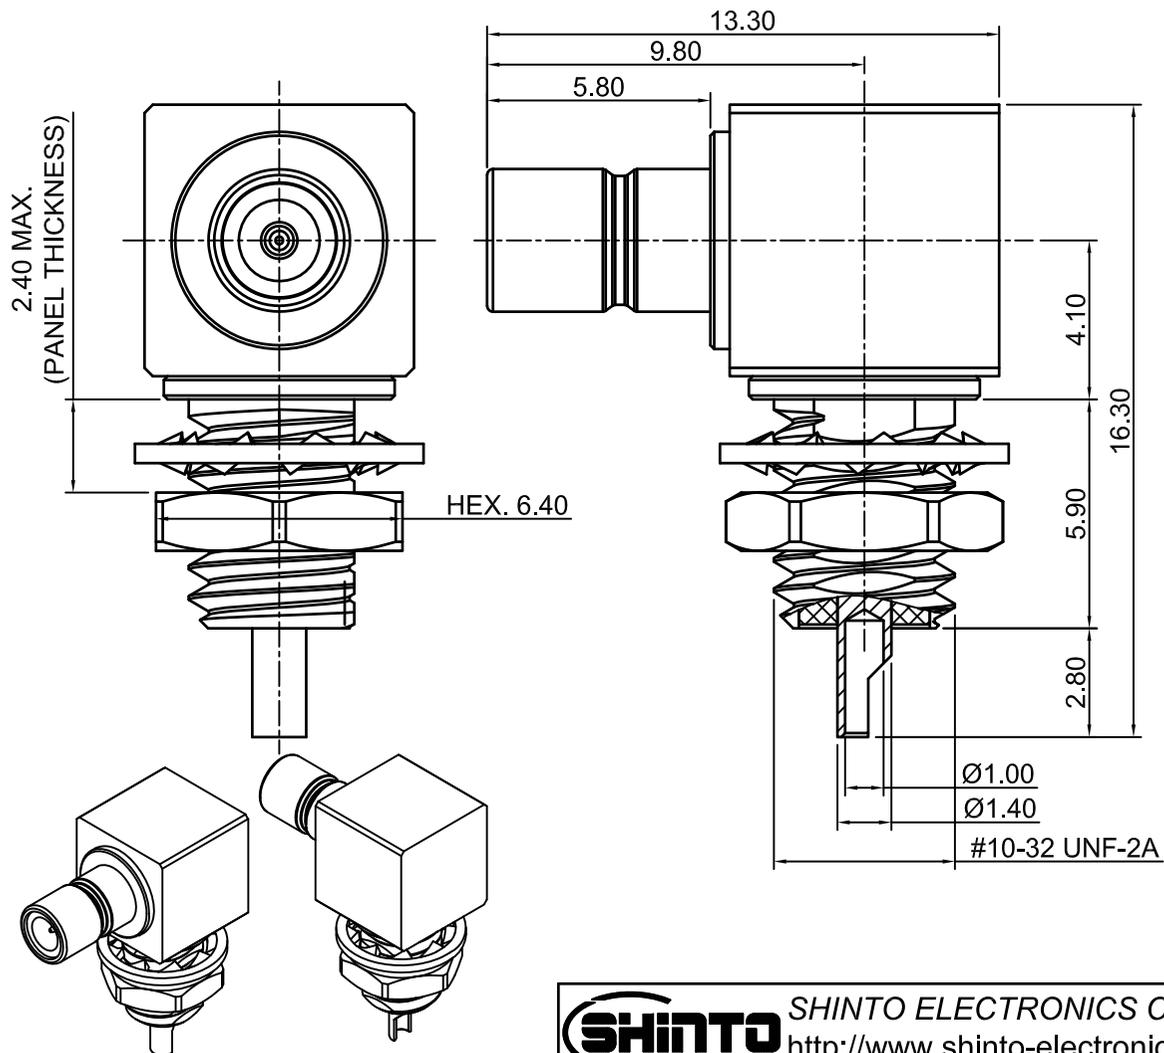


Rev.	ECN#	Description	Changed by	Date
A	NONE	FIRST RELEASE.	M.YANG	2024-01-24

- NOTE:**
1. ELECTRICAL CHARACTERISTICS:
    - 1.1 FREQUENCY RANGE:DC~3GHz
    - 1.2 IMPEDANCE:50Ω
    - 1.3 VSWR: 1.5
    - 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS. MIN.
    - 1.5 INSULATION RESISTANCE: 1000MΩ
  2. MECHANICAL CHARACTERISTICS:
    - 2.1 TEMPERATURE RANGE: -65°C~+165°C
    - 2.2 DURABILITY: 500 CYCLES MIN.
  3. ALL MATERIALS AND PROCESS ARE RoHS COMPLIANT.

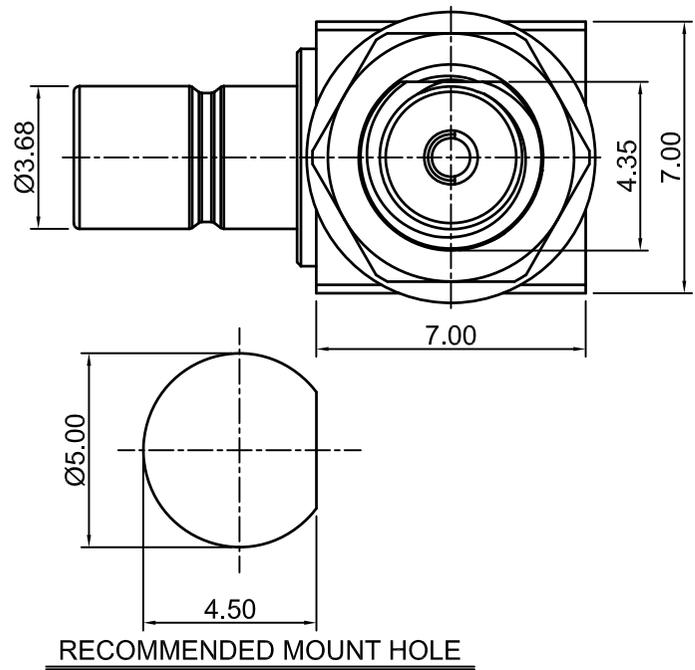

⑤	HEX. NUT	BRASS	NICKEL	1EA
④	WASHER	PHOSPHOR COPPER	NICKEL	1EA
③	CONTACT PIN	BRASS	GOLD	1EA
②	INSULATOR	TEFLON	NATURAL	2EA
①	BODY	BRASS	NICKEL	2EA
ITEM	NAME	MATERIAL	TREATMENT	QTY

**Bill Of Material**

TOLERANCES UNLESS OTHERWISE SPECIFIED	
ONE PLACE DECIMAL .X	±0.20
TWO PLACE DECIMAL .XX	±0.10
THREE PLACE DECIMAL .XXX	±0.02
HOLE DIA. VARIATION .XX	N/A
ANGULAR DIMENSION	±3°

Signature	
Approved By:	
Checked By:	
Drawn By:	M.YANG

**SHINTO ELECTRONICS CO.,LTD**  
http://www.shinto-electronics.com

Shinto P/N: SMB-LR-4

Description: SMB PLUG R/A FOR SOLDERING TYPE

Material:	See BOM	Treatment:	See BOM
Unit: mm	Size: A4	Scale: 5:1	Sheet: 1 of 1