

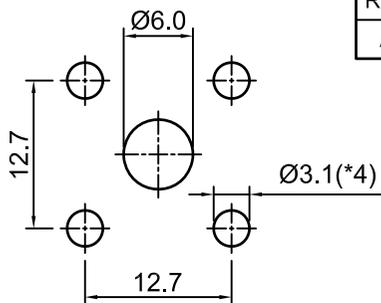
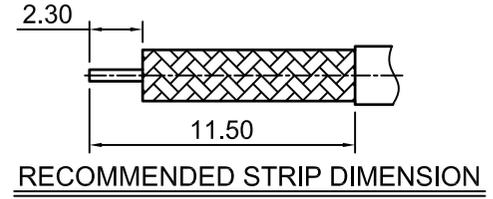
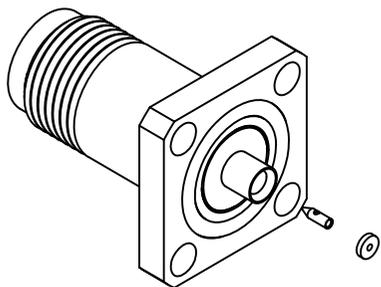


Rev.	ECN#	Description	Changed by	Date
A	NONE	FIRST RELEASE.	M.YANG	2021-05-29

- NOTE:**
1. ELECTRICAL CHARACTERISTICS:
    - 1.1 FREQUENCY RANGE:DC-6GHz
    - 1.2 IMPEDANCE: 50Ω,
    - 1.3 VSWR:1.3 MAX
  2. MECHANICAL CHARACTERISTICS:
    - 2.1 WATERPROOF CLASS: IP67 WITHOUT TNC PLUG
    - 2.2 TEMPERATURE RANGE: -20°C~+85°C
    - 2.3 DURABILITY: 500 CYCLES.
  3. ALL MATERIALS AND PROCESS ARE RoHS COMPLIANT

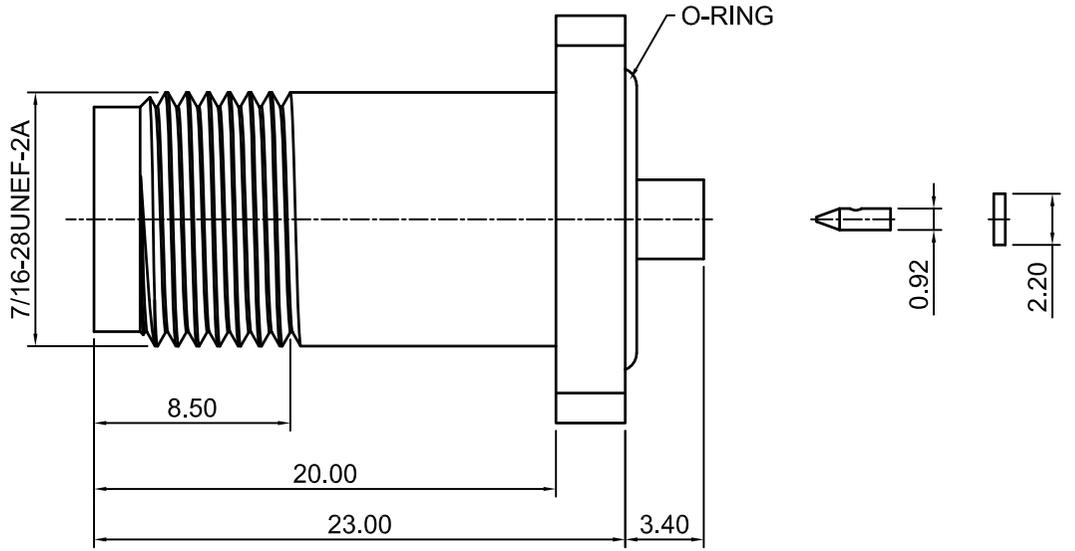

RECOMMENDED MOUNT HOLE 1.5:1

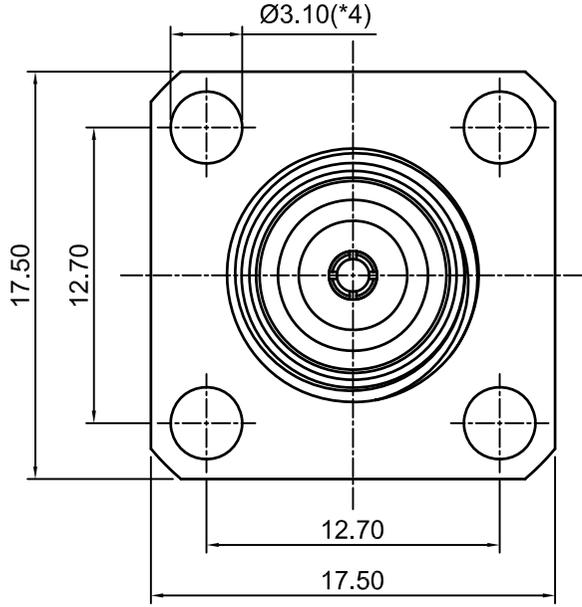

⑦	INSULATOR	TEFLON	NATURAL	1EA
⑥	CONTACT PIN	BRASS	GOLD	1EA
⑤	BARREL	BRASS	GOLD	1EA
④	O-RING	SILICONE RUBBER	NATURAL	3EA
③	INSULATOR	TEFLON	NATURAL	1EA
②	BODY	BRASS	NICKEL	1EA
①	CONTACT PIN	PHOSPHOR COPPER	GOLD	1EA
ITEM	NAME	MATERIAL	TREATMENT	QTY

**Bill Of Material**

TOLERANCES UNLESS OTHERWISE SPECIFIED		
ONE PLACE DECIMAL	.X	±0.20
TWO PLACE DECIMAL	.XX	±0.1
THREE PLACE DECIMAL	.XXX	±0.05
HOLE DIA. VARIATION	.XX	N/A
ANGULAR DIMENSION		±3°

Signature	
Approved By:	
Checked By:	
Drawn By:	M.YANG

<b>SHINTO</b> SHINTO ELECTRONICS CO.,LTD http://www.shinto-electronics.com	
Shinto P/N: TNC-PJ-086	
Description: TNC JACK PANEL FOR 086 CABLE WATERPROOF	
Material: See BOM	Treatment: See BOM
Unit: mm	Size: A4
Scale: 3:1	Sheet: 1 of 1