
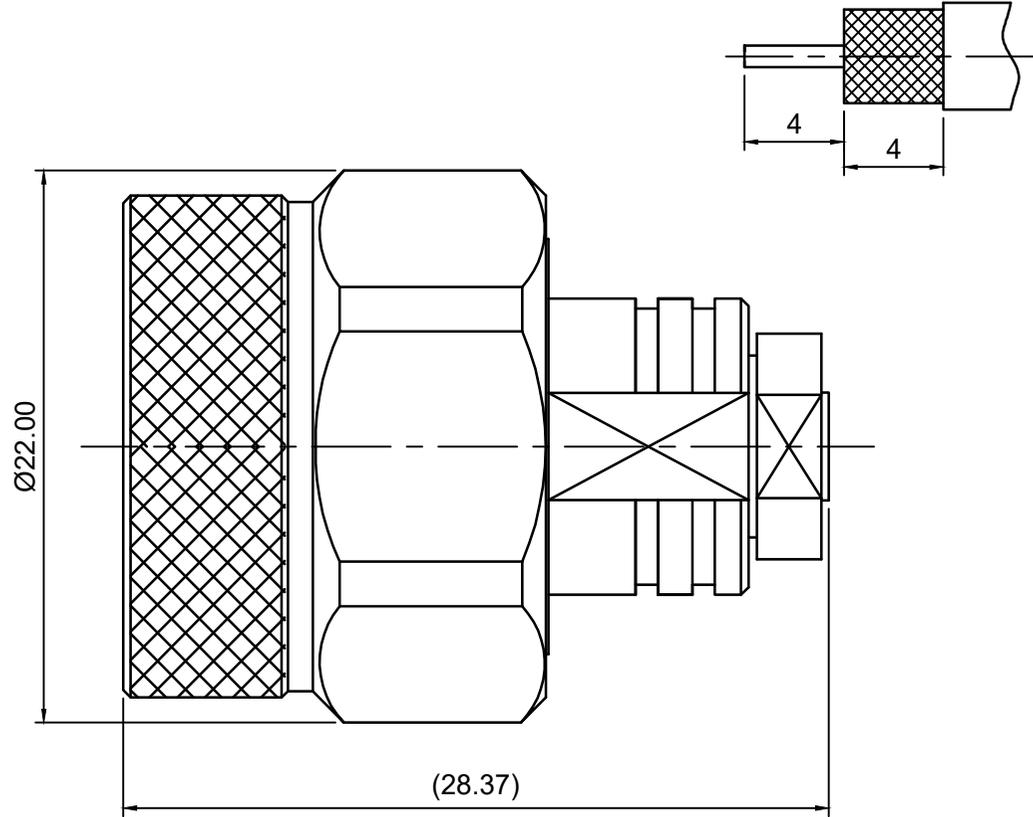


Customer code:	NONE	Part number:	N-P-3507-1	Rev:	A	Changing log			
----------------	------	--------------	------------	------	---	--------------	--	--	--

Rev.	ECN#	Description	Changed by	Date
A	NONE	FIRST RELEASE.	Jo.Yuan	2023-12-08

NOTE:

1. ELECTRICAL CHARACTERISTICS:
  - 1.1 IMPEDANCE:50Ω
  - 1.2 FREQUENCY RANGE:DC~18GHz
  - 1.3 VSWR:1.3 MAX
  - 1.4 INSERTION LOSS:≤0.05×sqrt(F(F in GHz)) dB
  - 1.5 DIELECTRIC WITHSTAND VOLTAGE:500V
  - 1.6 INSULATION RESISTANCE:5000MΩ MIN
2. MECHANICAL CHARACTERISTICS:
  - 2.1 DURABILITY: 500 CYCLES MIN.
3. TEMPERATURE RANGE: -55°C~+165°C
4. ALL MATERIALS AND PROCESS ARE RoHS COMPLIANT.

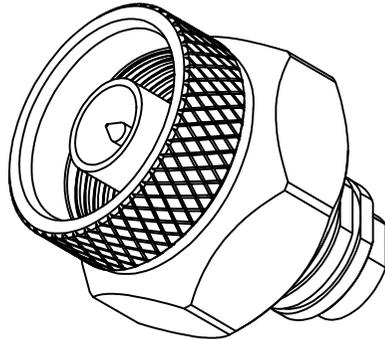

③	INSULATOR	PTFE	NATURE	1 EA
②	CENTER CONTACT	BERYLLIUM COPPER	GOLD	1 EA
①	OUTER CONTACT	STAINLESS STEEL	PASSIVATED	1 EA
ITEM	NAME	MATERIAL	TREATMENT	QTY

Bill Of Material

TOLERANCES UNLESS OTHERWISE SPECIFIED		
ONE PLACE DECIMAL	.X	±0.20
TWO PLACE DECIMAL	.XX	±0.10
THREE PLACE DECIMAL	.XXX	±0.02
HOLE DIA. VARIATION	.XX	N/A
ANGULAR DIMENSION		±3°

Signature		Shinto P/N: N-P-3507-1	
Approved By:	J.DENG	Description: N PLUG S/T FOR CXN3507	
Checked By:	M.YANG	Material: See BOM	Treatment: See BOM
Drawn By:	J.YUAN	Unit: mm	Size: A4
		Scale: 3:1	Sheet: 1 of 1

