

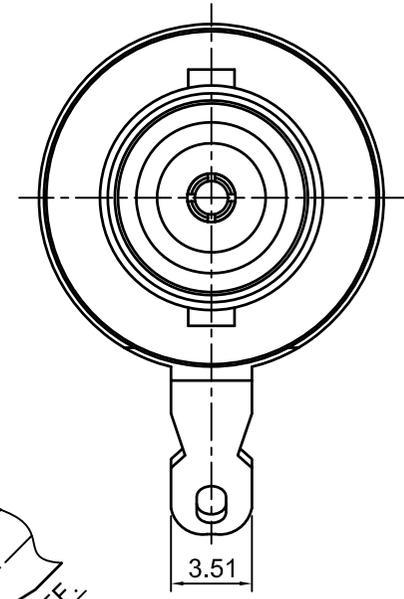
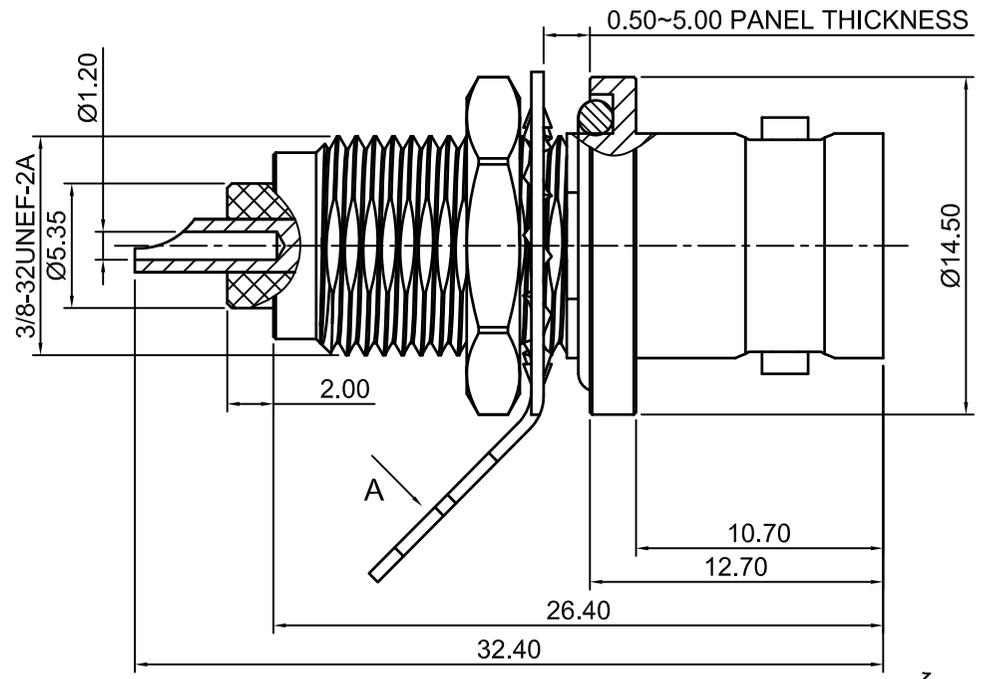
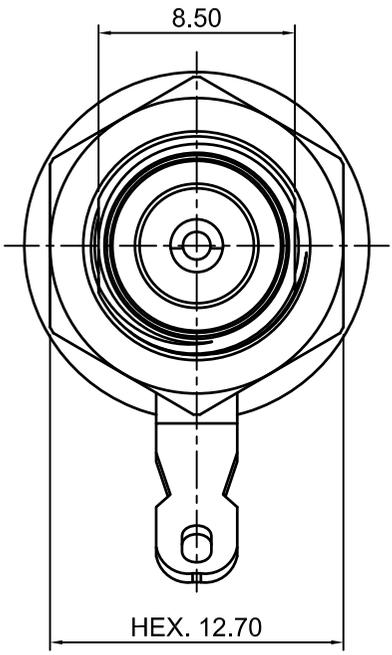



Rev.	ECN#	Description	Changed by	Date
A	NONE	FIRST RELEASE.	M.YANG	2022-01-21
B	NONE	MODIFIED THE SHAPE OF THE WASHER.	M.YANG	2022-11-08

**NOTE:**

1. ELECTRICAL CHARACTERISTICS:
  - 1.1 IMPEDANCE: 50Ω
  - 1.3 FREQUENCY RANGE:DC~6GHz
  - 1.4 VSWR: 1.5 MAX
2. MECHANICAL CHARACTERISTIC:
  - 2.1 TEMPERATURE RANGE: -55 ~ +155°C
  - 2.2 MATING CYCLES: 500 TIMES
3. ALL PROCESS TO BE COMPLIANT TO IPC-620.
4. ALL MATERIALS AND PROCESS ARE RoHS COMPLIANT.



VIEW IN DIRECTION-A

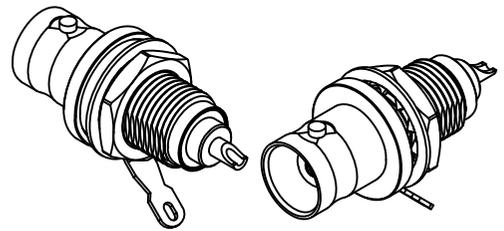

ITEM	NAME	MATERIAL	TREATMENT	QTY
⑥	HEX. NUT	BRASS	NICKEL	1EA
⑤	WASHER	PHOSPHOR COPPER	NICKEL	1EA
④	GASKET	SILICONE RUBBER	NATURE	1EA
③	CONTACT PIN	PHOSPHOR COPPER	GOLD	1EA
②	INSULATOR	TEFLON	NATURE	2EA
①	BODY	BRASS	NICKEL	1EA

**Bill Of Material**

TOLERANCES UNLESS OTHERWISE SPECIFIED	
ONE PLACE DECIMAL .X	±0.20
TWO PLACE DECIMAL .XX	±0.1
THREE PLACE DECIMAL .XXX	±0.05
HOLE DIA. VARIATION .XX	N/A
ANGULAR DIMENSION	±3°

Signature	
Approved By:	
Checked By:	
Drawn By:	M.YANG

<b>SHINTO</b> SHINTO ELECTRONICS CO.,LTD http://www.shinto-electronics.com	
Shinto P/N: BFS210000-A448	
Description: BNC JACK FOR PANEL SOLDER TYPE	
Material: See BOM	Treatment: See BOM
Unit: mm	Size: A4
Scale: 3:1	Sheet: 1 of 1